

UNIVERSAL LED LIGHT



LED light uses 3 AAA batteries.
(Not Included)

PLEASE READ AND UNDERSTAND ALL INSTRUCTIONS BEFORE YOU BEGIN.

The universal LED light can be mounted to any hard flat surface. Below is a suggestion for use as a dome light in a JK.


JK Header installation:

Step 1. Remove the mounting plate from the LED light by sliding to the side.

Step 2. Place the mounting plate on the soft top header centering it between the visors and marking the mounting holes.



Step 3. Use the supplied screws to make the mounting holes for the light. Use moderate pressure to get the screws started. Once both holes have been made remove the screws and attach the mounting plate.

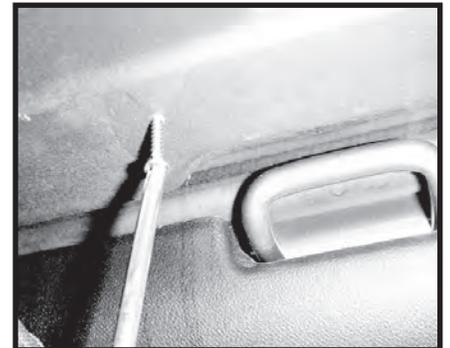

Step 4. Attach the light to the mounting plate by lining up the tabs and sliding to the side to lock in place.

Note: The light will clip in and line up with the mounting plate in only one direction.



For Technical Assistance Contact:
OMIX-ADA Tech Support
Phone: 1-800-449-6649
Email: techsupport@omix-ada.com
Web: www.Omix-Ada.com